

TEMPERING VESSEL

Pharmaceutical container with double jacket

Material

1.4404 (316L)

Finishing

electropolished inside and outside

Volumes

0.1 to 200 liters (see type overview)

Gaskets

EPDM, silicone or PTFE

Pressure

-1/ 5 bar

Other

GMP-compliant documentation

Equipment

Central Tri-Clamp nozzle with:


- **OUT** Immersion tube with Tri-Clamp connection
- **GAS** pipe bend with Tri-Clamp connection

Above cylindrical part and bottom:

- **DOUBLE MANTLE**



Type	Material	Finishing	Volume [l]	Ø Da [mm]	H [mm]	s [mm]	Mass [kg]	Pressure [bar]
JCD 0.25	1.4404 (316L)	electropolished	0,3	67	200	1	3	-1/+5
JCD 0.5	1.4404 (316L)	electropolished	0,6	89	230	1	4	-1/+5
JCD 01	1.4404 (316L)	electropolished	1,3	108	250	1	4	-1/+5
JCD 02	1.4404 (316L)	electropolished	3	140	325	1	5	-1/+5
NCD 05	1.4404 (316L)	electropolished	6	181	380	1,5	6	-1/+5
NCD 10	1.4404 (316L)	electropolished	12	229	430	1,5	8	-1/+5
NCD 20	1.4404 (316L)	electropolished	22	278	500	1,5	15	-1/+5
NCD 30	1.4404 (316L)	electropolished	33	324	620	1,5	22	-1/+5
NCD 50	1.4404 (316L)	electropolished	53	363	700	1,5	28	-1/+5
HCD 100	1.4404 (316L)	electropolished	110	450	900	2	48	-1/+5
MCD 150	1.4404 (316L)	electropolished	160	550	950	2,5	60	-1/+4
HCD 200	1.4404 (316L)	electropolished	205	550	1050	2	68	-1/+4

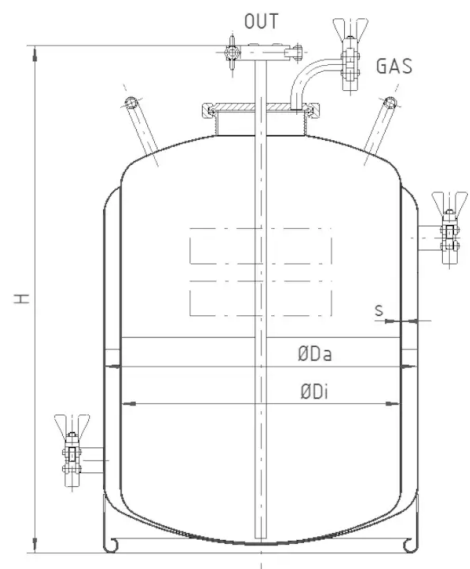

Safety for people, product and the environment



Dipl.-Ing. Wilhelm Schmidt GmbH

Breslauer Str. 14

64342 Seeheim-Jugenheim

Germany

+49 6257 50 69 0

+49 6257 50 69 50

info@schmidt-seeheim.de

www.schmidt-seeheim.com