

DRAIN TANK

Sterile container with bottom outlet for complete emptying of residues

Material

1.4404 (316L)

Finishing

electropolished inside and outside

Volumes

0.1 to 200 liters (see type overview)

Gaskets

EPDM, silicone or PTFE

Pressure

-1/ 5 bar

Other

GMP-compliant documentation

Equipment

Central Tri-Clamp nozzle with:


- **OUT/MIX** immersion tube with PTFE-coated double magnetic stirrer
- Tri-Clamp connection
- **GAS** pipe bend with Tri-Clamp connection

Centered in the underbody:

- **DRAIN** floor outlet in 90° bend with Tri-Clamp connection



Type	Material	Finishing	Volume [l]	∅ Da [mm]	H [mm]	s [mm]	Mass [kg]	Pressure [bar]
JCS 0.25	1.4404 (316L)	electropolished	0,3	67	300	1	2	-1/+5
JCS 0.5	1.4404 (316L)	electropolished	0,6	89	330	1	3	-1/+5
JCS 01	1.4404 (316L)	electropolished	1,3	108	350	1	3	-1/+5
JCS 02	1.4404 (316L)	electropolished	3	140	425	1	3	-1/+5
NCS 05	1.4404 (316L)	electropolished	6	181	480	1,5	4	-1/+5
NCS 10	1.4404 (316L)	electropolished	12	229	600	1,5	7	-1/+5
NCS 20	1.4404 (316L)	electropolished	22	278	700	1,5	9	-1/+5
HCS 30	1.4404 (316L)	electropolished	33	324	750	2	14	-1/+5
HCS 50	1.4404 (316L)	electropolished	53	363	900	2	18	-1/+5
HCS 100	1.4404 (316L)	electropolished	110	450	1050	2	35	-1/+4
MCS 150	1.4404 (316L)	electropolished	160	550	1100	2,5	44	-1/+4
HCS 200	1.4404 (316L)	electropolished	220	600	1200	2	50	-1/+4

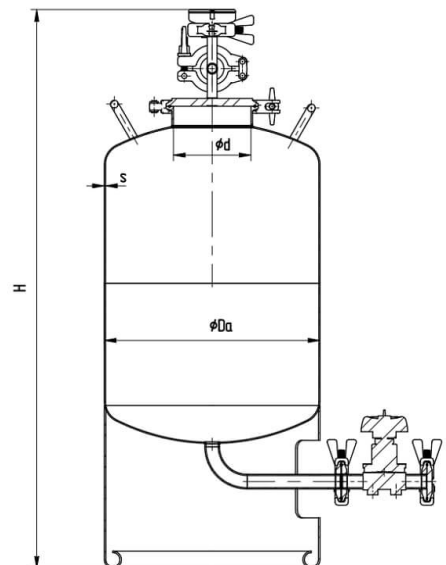

Safety for people, product and the environment



Dipl.-Ing. Wilhelm Schmidt GmbH

Breslauer Str. 14

64342 Seeheim-Jugenheim

Germany

+49 6257 50 69 0

+49 6257 50 69 50

info@schmidt-seeheim.de

www.schmidt-seeheim.com