

# LINED CONTAINER

Stainless steel tank with ETFE interior coating

## Transport approval

UN 1A1/X2/900 (special ADR/RID packing instructions possible)

## Material

1.4301 (304) or 1.4404 (316L)

## Pressure

-1 to 5 bar

## Finishing

- inside: seamless ETFE inner coating sprayed (1 mm) or rotolined (3 mm)
- exterior: stained or electropolished

## Gaskets

PTFE, chambered


## Equipment

Central flange with:

- **OUT** PFA riser pipe with PFA diaphragm valve and PTFE quick coupling
- **GAS** PFA diaphragm valve and PTFE quick coupling



Type	Material	Finishing	Volume [l]	Ø Da [mm]	H [mm]	s [mm]	Mass [kg]	Pressure [bar]
JFC 0.25	1.4404 (316L)	stained	0,3	67	300	1	2	-1/+5
JFC 0.5	1.4404 (316L)	stained	0,6	89	330	1	3	-1/+5
JFC 0.1	1.4404 (316L)	stained	1,3	108	350	1	3	-1/+5
JFC 02	1.4404 (316L)	stained	2,9	140	350	1	6	-1/+5
JFC 05	1.4404 (316L)	stained	6	181	410	1	7	-1/+5
NFC 10	1.4404 (316L)	stained	12	229	500	1,5	11	-1/+5
NFC 20	1.4404 (316L)	stained	23	278	580	1,5	14	-1/+5
NFC 30	1.4404 (316L)	stained	33	324	625	1,5	16	-1/+5
NFC 50	1.4404 (316L)	stained	53	363	690	1,5	18	-1/+5
HFC 100	1.4404 (316L)	stained	110	450	920	2	34	-1/+4
MFC 200	1.4404 (316L)	stained	205	550	1085	2,5	48	-1/+4
GFC 200	1.4404 (316L)	stained	220	600	1100	3	95	-1/+4
GFC 400	1.4404 (316L)	stained	430	800	1300	3	130	-1/+2,3

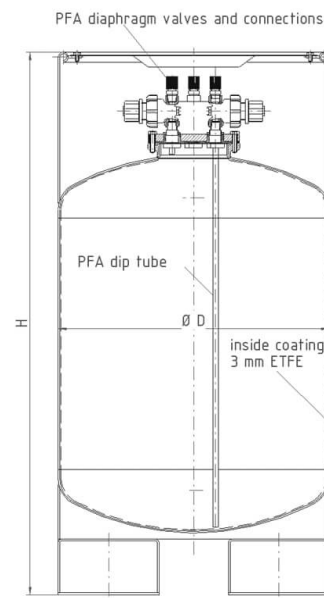

*Safety for people,*



**Dipl.-Ing. Wilhelm Schmidt GmbH**  
 Breslauer Str. 14  
 64342 Seeheim-Jugenheim  
 Germany

+49 6257 50 69 0  
 +49 6257 50 69 50  
 info@schmidt-seeheim.de  
 www.schmidt-seeheim.com