

DANGEROUS GOODS CONTAINER

Stainless steel drum in closed system with riser pipe

Transport approval

UN 1A1/X2/900 (special ADR/RID packing instructions possible)

Material

1.4301 (304) or 1.4404 (316L)

Finishing

stained in the bath or electropolished inside and outside

Volumes

10 to 200 liters (see type overview)

Gaskets

PTFE or Viton



Pressure

-1 to 5 bar

Equipment

Topsoil with:

- **FILL** Center opening 3/4" or 2" with TRI SURE screw cap
- **OUT** Riser pipe with ball valve and screw fitting or quick coupling
- **GAS** ball valve with union or quick coupling

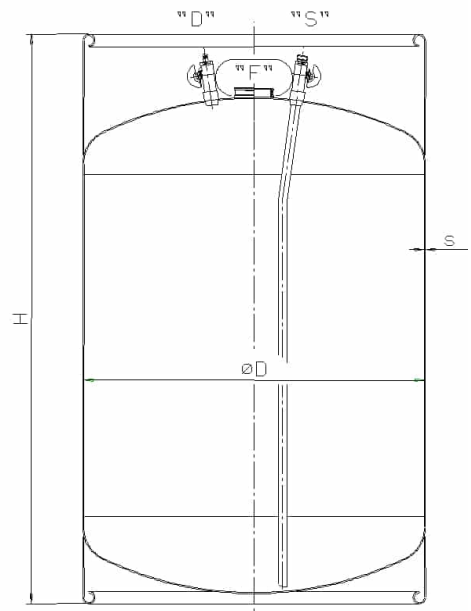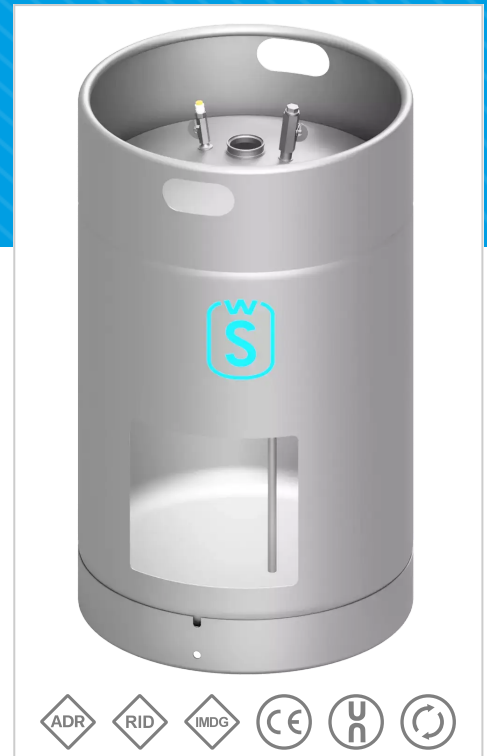

Type	Material	Finishing	Volume [l]	Ø Da [mm]	H [mm]	s [mm]	Mass [kg]	Pressure [bar]
KPK 10	1.4301 (304)	stained	12	278	395	1,5	10	-1/+5
LPK 20	1.4301 (304)	stained	23	278	545	1,5	12	-1/+5
LPK 30	1.4301 (304)	stained	33	324	610	1,5	14	-1/+5
LK 50	1.4301 (304)	stained	53	363	690	1,5	16	-1/+5
LK 100	1.4301 (304)	stained	110	450	945	2	30	-1/+4
LK 200	1.4301 (304)	stained	200	600	965	2	43	-1/+4
NPK 10	1.4404 (316L)	stained	12	278	395	1,5	10	-1/+5
NPK 20	1.4404 (316L)	stained	23	278	545	1,5	12	-1/+5
NPK 30	1.4404 (316L)	stained	33	324	610	1,5	14	-1/+5
NK 50	1.4404 (316L)	stained	53	363	690	1,5	16	-1/+5
HK 100	1.4404 (316L)	stained	110	450	945	2	30	-1/+4
HK 200	1.4404 (316L)	stained	200	600	965	2	43	-1/+4

Safety for people, product and the environment



Dipl.-Ing. Wilhelm Schmidt GmbH
 Breslauer Str. 14
 64342 Seeheim-Jugenheim
 Germany

+49 6257 50 69 0
 +49 6257 50 69 50
 info@schmidt-seeheim.de
 www.schmidt-seeheim.com